

# CELLINK NEO 8+



## SMART POWER with LiFePO4 technology



## CELLINK NEO 8+

### The Ultimate Supplementary Dash Cam Power Source

The Cellink NEO 8+ is a specially designed battery pack that provides independent power to dash cam devices, delivering extended Parking Mode operation and increased recording time, without ever having to draw power from the vehicle's battery. NEO 8+ charges when the vehicle is running and provides continuous 12V power when the ignition is switched-off and the vehicle is unattended, for example when parked overnight, allowing the dash cam to continue recording in Parking Mode for extended periods of time.

The NEO 8+ can be powered from the cigarette lighter socket for plug & play simplicity, or alternatively hardwired to the vehicle's electrical system for super-fast 50 minute charging. It is capable of powering a standard single channel dash cam for up to 55 hours of continuous recording (dash cam model dependant) or several days of periodic recording if the dash cam is set to trigger by motion or impact only.

The NEO 8+ is built to last and is manufactured using high quality anodised aluminium and powered by state-of-the-art LiFePO4 (Lithium Iron Phosphate) battery technology, developed to withstand extreme temperatures, go through more charge cycles, and be kinder to the environment than a traditional Lithium-ion battery.

### COMPATIBILITY

Cellink NEO batteries are acclaimed by professionals for their reliability and are compatible with a wide variety of dash cam brands including Nextbase, BlackVue, Garmin, Thinkware and MIO.

### PLUG & PLAY OR HARDWIRE INSTALLATION

NEO 8+ can be powered from any cigarette lighter socket without the need for installation, or alternatively hardwired out-of-sight in the glovebox or boot. It charges to capacity in 100 minutes from the cigarette lighter socket, or only 50 minutes when hardwired. The NEO 8+ package includes all cabling hardware necessary for plug & play and hardwired installation.

### KEY FEATURES

- Powers a dash cam in Parking Mode without using vehicle's battery
- Extended operation - up to 55hrs of constant recording (dash cam dependant)
- 50 mins charge time when hardwired, 100 mins via cigarette lighter socket
- Hardwire or simple plug & play via cigarette lighter socket
- Battery Manager App for iOS & Android
- Expandable - add Cellink EXT 7+ expansion batteries to increase capacity
- New slim design, anodised aluminium enclosure
- Compatible with a range of brands inc. BlackVue, Nextbase, Garmin, Thinkware, VanTrue, Road Angel and MIO
- Safe and dependable LiFePO4 (Lithium Iron Phosphate) technology





### EXPANDABLE



Connect up to 5 x Cellink EXT 7 expansion battery packs in sequence to massively increase power reserves. Each EXT 7 expansion battery has a capacity of 84.5Wh and adds over 45 hours of recording time.

## NEO BATTERY MANAGER APP

The Cellink NEO Battery Manager app for iOS & Android is available free-of-charge and visualises important information including overall battery percentage, whether the battery is charging or discharged, how long it can power the dash cam and how long it'll take until the battery is fully charged.

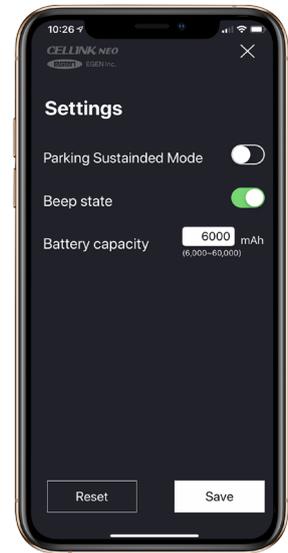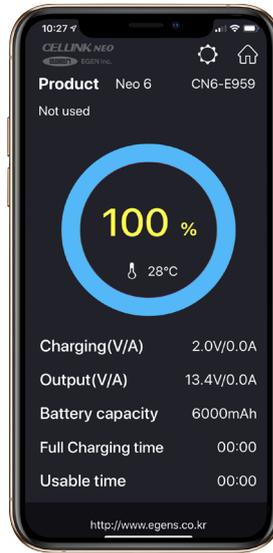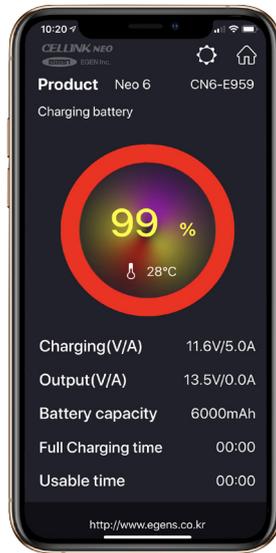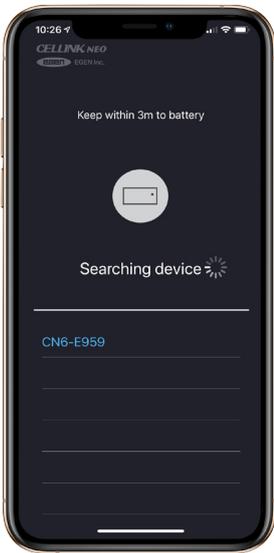

## BOX CONTENTS



NEO 8+



Vehicle Hardwire Cable



Output Cable for Dash Cam



Velcro Strips (2 included)



Vehicle Power Cable



Fuse Tap Kit (3 Types)



Output Cable for Dash Cam

## SPECIFICATIONS

- **Battery Cell Type :**  
LiFePo4 (Lithium Iron Phosphate)
- **Colour / Size / Weight :**  
Black / 151mm (W) x 205.2mm (L) x 32.6mm (H) / 1.45kg
- **Input Voltage / Current :**
  - Cigarette lighter plug: 12V - 17V\_Max 6A
  - Hardwired: 12V - 17V\_Max 135A
- **Charging Voltage / Current :**
  - Cigarette lighter plug (FIX) : 14.2V / 4.5A
  - Hardwired (ADJ) : 14.2.4V / 9.5
- **Charging Time :**
  - Cigarette lighter plug (standard 4.5A charging): Approx. 100 mins
  - Hardwired (rapid 8.5A charging): Approx. 50 mins
- **Hours of Use :**
  - Up to 24 hours (based on a 2CH dash cam that consumes 4Wh)
- **Capacity :**
  - 12.8V / 7,50mAh / 96Wh
- **Output Voltage / Current :**
  - Dashcam port: 11V – 14.2 V / 2A (max)
  - USB Chargeport : 5V Max 2A
- **Operating Temperature:**
  - Charging Temperature: 0° – 45°C (32° – 113°F)
  - Discharging Temperature: -10° – 60°C (14°F – 140°F)
  - Storage Temperature: -10° – 35°C (-14°F – 95°F)
- **High Temperature Cut-Off :**
  - Approx. 80°C (176°F)